

16/10/05

METHOD AND APPARATUS FOR CONTROLLING AND APPLYING RESOURCE OFIDLE SCREEN ON MOBILE**Technical Field**

5 The present invention relates to a mobile communication terminal and method of driving the same, and an idle screen service system and method using the same. More particularly, the present invention relates to a mobile communication terminal, which has an idle screen function of providing idle screen
10 information that is set in a terminal and an Internet service by a user to a user mobile communication terminal, and displaying the provided idle screen information, and provides a method of displaying an idle screen, a method of driving the same, and an idle screen service system and method using the same.

15

Background Art

 With the development of a wireless Internet service, a user-oriented information service has been provided, which comes to popularize a wireless Internet. Generally, in a wireless
20 Internet service system, any information is transmitted to a user in the form of a SMS (Short Message Service) message. Information received as the SMS message is stored in a mobile communication terminal as a simple message. In this case, multimedia information such as financial information and
25 entertainment banner are not consistently shown.

 In a current wireless Internet service system, the use of

multimedia information has increased due to the adoption of a color screen of a mobile communication terminal, the higher specification of the portable mobile communication device, the improvement of wireless Internet speed, and the like.

5 Further, a convention information transmission method is accomplished through SMS service for specialized information not information set by a user. Thus, there is a disadvantage in that a user cannot set and use a variety of financial information and entertainment information.

10 Moreover, in the conventional information transmission service using SMS service, the amount of data that can be transmitted at once is limited. Thus, there is a problem in that information of an audio or video type cannot be provided to a user.

15 Furthermore, the conventional information transmission service using SMS simply transmits information. Thus, there is a problem in that it does not provide an interactive function with a user who accesses a relevant wireless Internet web site through a hyperlink function.

20 Also, the convention information providing method has problems in that a user can obtain information only through access using an Internet access application or browser built in a portable mobile communication device, and specialized information every user cannot be provided.

25 In order to solve the above-described conventional problems, there was proposed Korean Patent Registration No.391291 the

applicant of which is the same as that of this application.

Korean Patent Registration No.391291 discloses that contents information to be provided to a mobile communication terminal are converted into a message format which is suitable for transmission through a mobile communication network, and the converted sliding message is transmitted to the mobile communication terminal, so that a user can confirm the contents information. However, Korean Patent Registration No.391291 does not disclose concrete embodiments of a method of configuring templates in which contents information is displayed and a method of providing information. In this connection, the present invention proposes a more detailed method of configuring templates and a method of providing information.

15 **Technical Problem**

Accordingly, the present invention has been made in view of the above problems occurring in the prior art, and it is an object of the present invention to provide a mobile communication terminal having an idle screen control function in which idle screen information for user information is received/stored, and the stored idle screen information is displayed.

Another object of the present invention is to provide a method of driving a mobile communication terminal having the idle screen control function, and an information providing method.

Still another object of the present invention is to provide a method of providing information requested by a user using a mobile communication network for providing relevant information to a mobile communication terminal according to information set
5 by a user who wants to receive the information through the mobile communication terminal or an Internet accessible PC, and an idle screen service method.

Further another object of the present invention is to provide a system for performing the idle screen service method
10 using the mobile communication network.

Further another object of the present invention is to provide a method of displaying resources stored in a portable mobile communication device, which are frequently used by a user, on an idle screen in the form of an icon so that the user can
15 easily use the resources.

Further another object of the present invention is to provide a method of operating and managing a channel so that the transfer of information can be controlled and managed in an efficient manner.
20

Technical Solution

To achieve the above object(s), according to the present invention, there is provided an apparatus for controlling and operating resources of an idle screen for a mobile communication
25 terminal having an idle screen control function, including the mobile communication terminal on which desired contents

information is displayed through a mobile communication network;
a contents providing server for providing the contents
information; an idle screen providing server that provides a
message corresponding to the provided contents information to a
5 message providing server; and the message providing server for
receiving the message, which is converted to have an idle screen
message format, from the idle screen providing server, and then
providing the message to the mobile communication terminal
through the communication network, wherein the mobile
10 communication terminal comprises a data viewer, which is a
module for receiving push data or pull data for information set
by a user and displaying those data according to a predetermined
format, and the idle screen providing server comprises an idle
screen control system that provides a function of generating an
15 idle screen message, a contents information management server
that provides a community service, a PDM server that performs an
optimization function of personal information management, and a
CRM server that provides a variety of services depending on a
user.

20 According to the system in accordance with the present
invention, the contents information providing server and the
idle screen providing service server can be physically
constructed as a single server. It is also possible to provide
information requested by a user using the mobile communication
25 network for providing relevant information to the mobile
communication terminal according to information that is set by

the user who wants to receive the information.

According to the present invention, there is provided a method of controlling and operating resources of an idle screen for a mobile communication terminal in a method of controlling the idle screen of the mobile communication terminal of a system for providing contents information that is transmitted to the mobile communication terminal, including the steps of (a) allowing a user to join a service so as to receive contents information through the mobile communication terminal, and to set or select the contents information; (b) allowing a service server to cooperatively operate with a contents information provider, classify multimedia information received from the contents information provider based on the contents information within the service server, and allocate a channel and a stack; (c) allowing idle screen information corresponding to the contents information that is set or selected by the user to be pushed from the service server, and the pushed information to be displayed on an idle screen; (d) allowing the user to pull detailed contents information among pushed contents information on the idle screen, which is displayed on an initial screen, and to receive the pulled contents information; and (e) allowing the contents information that is received in step (d) to be read from a memory and a storage unit of the mobile communication terminal, and the contents information to be displayed according to a predetermined screen configuration of the mobile communication terminal, wherein the contents information

displayed on the idle screen in step (c) is displayed based on a given template configuration.

Advantageous Effects

According to a method of the present invention, it is possible to provide information requested by a user using a mobile communication network for providing relevant information to a mobile communication terminal according to information that is set by the user who wants to receive the information. Further, resources stored in a portable mobile communication device, which are frequently used by a user, can be displayed on an idle screen in the form of an icon as a divided screen, a screen of a sliding mode or in explicit real time. Also, a service provider can allocate channels for specific uses such as providing contents and providing a service of an external service provider, and can thus promote various business.

Brief Description of Drawings

FIG. 1 is a view illustrating the configuration of an idle screen service system using a mobile communication network according to the present invention;

FIG. 2 is view for explaining the configuration between a portable mobile communication device and an idle screen control system according to the present invention;

FIG. 3 is a block diagram showing the construction of an

idle screen control server according to the present invention;

FIG. 4 is a block diagram showing the construction of a mobile communication terminal according to the present invention;

5 FIG. 5 is a view for explaining an idle screen display method of the mobile communication terminal according to the present invention;

FIG. 6 is a flowchart for explaining an information processing structure by the service step;

10 FIG. 7 is a view for explaining an idle screen template type of the mobile communication terminal according to an embodiment of the present invention;

FIG. 8 is a view for explaining an idle screen template type of the mobile communication terminal according to another
15 embodiment of the present invention;

FIG. 9 is a view for explaining an idle screen template type of the mobile communication terminal according to still another embodiment of the present invention;

FIG. 10 shows a channel configuration that is provided from
20 a service provider for providing contents information according to an embodiment of the present invention;

FIG. 11 shows an embodiment of channeling of divided screens that are provided in the form of multimedia;

FIG. 12 shows an embodiment of divided screens that are
25 provided in the form of multimedia;

FIG. 13 is a view for explaining a sliding method, which is

an example of an information display method in which contents information is displayed and an information providing method according to the present invention;

FIG. 14 is a view for explaining a sliding method, which is
5 an example of an information display method in which contents information is displayed and an information providing method according to the present invention;

FIG. 15 is a view for explaining an icon enlargement method, which is an example of an information display method in which
10 contents information is displayed and an information providing method according to the present invention; and

FIG. 16 is a view for explaining a real-time service providing method in the idle screen template type of the mobile communication terminal shown in FIG. 9 according to the present
15 invention.

Best Mode

The present invention will now be described in detail in connection with preferred embodiments with reference to the
20 accompanying drawings.

FIG. 1 is a view illustrating the configuration of an idle screen service system using a mobile communication network according to the present invention.

Referring to FIG. 1, the idle screen service system using
25 the mobile communication network according to the present invention includes a mobile communication terminal 10, an idle

screen providing server 20, a mobile communication terminal subscriber information server 30, and a SMS message server 40.

The mobile communication terminal 10 has access to the idle screen providing server 20 through the mobile communication network, sets desired information, receives a SMS message based on the set information through the mobile communication network, stores the received SMS message in a memory of the mobile communication terminal, combines the stored information and converts it into an image form to be displayed, and displays the stored information in a given cycle or when an event occurs.

The idle screen providing server 20 is a server in which a contents providing server for providing a variety of contents and an idle screen providing server are integrated into one. In this time, the two servers can be physically separated.

The contents providing server integrated into the idle screen providing server 20 provides a variety of contents including news information, financial information, entertainment information, educational information, weather information, shopping information, a schedule, auction information, etc. to the idle screen providing server 20. Further, the contents providing server allows a user to set information that will be received via the mobile communication network in the mobile communication terminal 10, and provides a SMS message of contents information, which is converted into an idle screen message format, to the SMS message server 40 based on subscription information from the mobile communication terminal

subscriber information server 30. In this time, a transmission line of the processed SMS message can preferably include a dedicated line.

5 The idle screen providing server 20 provides a variety of contents including news information, financial information, entertainment information, educational information, weather information, shopping information, a schedule, auction information, etc. to the mobile communication terminal 10.

10 The SMS message server 40 receives the SMS message that is processed into the idle screen information form from the idle screen providing server 20, and transmits the SMS message through the mobile communication network.

15 It has been described above that information of various contents, which has been converted into the idle screen information format, is converted into the SMS message through the SMS message server, which is used in the mobile communication network, as an example. However, it will be evident that if IMT-2000 and the like including HTTP, CBS, SMS, etc. is commercialized, the above process can be accomplished
20 through a component for converting information into the message format of IMT 2000.

FIG. 2 is view for explaining the configuration between the portable mobile communication device and the idle screen control system according to the present invention.

25 Referring to FIG. 2, the portable mobile communication device and the idle screen control system according to the

present invention includes a data viewer 101, a configuration manager 102, a display manager 103, an event handler 104, a push data manager 105, a pull data manager 106, a data interface module 107, an administration manager 111, a scheduler 112, a
5 push agent 113, a pull agent 114, a user profile simulator 115, a user profile manager 116, a data format & utility 117, an information match maker 118, a contents server gateway 119 and a database 120.

The data viewer 101 includes a module and other utilities
10 (cooperatively operate with image decode and contents player) for allowing information set by a user to be displayed in a format defined by pull data. The configuration manager 102 manages data configuration information of respective regions constituting the idle screen, and the history that is set by a
15 user through the terminal screen.

The display manager 103 properly displays data constituting the respective regions of the idle screen, and is responsible for the display of text and image, the display of quick launch icons set by a user, a navigation focus process, a pop-up
20 process and so on. The event handler 104 processes various events generated by a user or a terminal, and is responsible for various key events including a direction key and event processes (data view, various anti-interruption processes) generated from a terminal. The event handler 104 can execute a built-in browser
25 or a virtual machine (VM) application, etc., if needed.

The push data manager 105 is a module for processing push

data, and is responsible for rejection, storage, display, etc. of data. The push data can include control data for initiating a data pull or setting an environment of a terminal, as well as general data. The pull data manager 106 is a module for
5 processing pull data, and can transfer data to the data viewer module for display, if needed. Further, the pull data manager 106 enables a pull operation to be performed according to control data of push data.

The data interface module 107 is constructed utilizing push
10 related API of a terminal, such as SMS, CBS, Data Service, etc., and is responsible for the interface of the idle screen control system.

The administration manager 111 is a module for managing the idle screen control system. It is responsible for management and
15 authentication of an administrator account, various statistical data reporting, process monitoring and management (start, stop, restart, etc.), configuration and the like. The scheduler 112 allows a user to search a time, cycle, set event and so on, which are set in a profile, and to perform a necessary operation
20 (push).

The push agent 113 serves to transmit push data that is processed by the data formatter 117 to the push system (SMS, CBS) of the service provider. The pull agent 114 is a module for processing a data pull request from a terminal, and serves to
25 data requested by a terminal to the terminal.

The user profile simulator 115 serves to process user

profile setting through a PC having access to the Internet and terminal simulation therefore. The user profile manager 116 is a module for allowing a user to manage his profile, and it manages configuration information management of each region, information
5 receive cycle or time setting, change, addition and deletion of a profile, user authentication and the like and operates in association with the configuration manager 102.

The data formatter and utility 117 serves to convert data extracted from the information match maker 118 into a format,
10 which can be recognized by the idle screen control client of the terminal before being sent to the terminal. It includes various utilities (image conversion, etc.), which are necessary for data formatting, etc.

The information match maker 118 serves to search data that
15 is set in a profile by a user and to extract only data set by the user from data received from the contents server.

The contents server gateway 119 is a module that provides an interface for receiving data from an external contents server that provides contents to be transmitted to the terminal. The
20 database 120 serves to store and manage user profile, contents, various statistical information, and the like.

FIG. 3 is a block diagram showing the construction of the idle screen control server according to the present invention.

Referring to FIG. 3, the idle screen control server
25 according to the present invention allows respective functions to provide a wireless Internet push and pull message management

solution through optimal cooperation. The idle screen control server includes an idle screen control system 150, a contents management server 151, a PDM server 152, a CRM server 153, an advertising server 154, a pull data controller 155 and so on.

5 The idle screen control system 150 provides a function of generating an idle screen SMS message, and can perform real-time assignment of channel headers by information, real-time generation and updating of channel information, compression and splitting of image information, and the like. Further, the
10 contents management server 151 can provide information such as news, finance, entertainment, fortune and shopping, positional information, community service of meeting information, etc. The PDM server 152 allows management of personal information to be optimized. In addition, the CRM server 153 allows a variety of
15 services based on a user's propensity to be easily provided. The advertising server 154 is responsible for various banner advertising, policy public information, etc. through an wireless Internet.

 The pull data controller 155 manages updating of
20 information when an event occurs or at a given cycle in response to an information transmission module, which is requested by a portable mobile communication device. It also transmits data according to a request from the terminal, and allows synchronization of personal information between the terminal and
25 the server.

FIG. 4 is a block diagram showing the construction of a

mobile communication terminal according to the present invention.

An owner of a mobile communication terminal can specify the type of an information service, which will be provided through a screen of the terminal, and the type that the service is
5 displayed on the screen.

The terminal must display IOD (Information On Demand) provided by the server in the form desired by a user. The terminal processes a request for IOD information through two types.

10 The first type is to process SMS message information or location or environment information for requesting a server for information through push data. The received SMS information is managed by the storage of the terminal. If the push data have SMS information to be displayed on the screen, they are
15 displayed through an IntroPAD UI manager 410. If the push data are environment information related to display environment or information cycle, they are processed by an IntroPAD configurator 420. The IntroPAD configurator 420 processes information on an updating cycle or a display type through the
20 scheduler 430 and the IntroPAD UI manager 410.

The second type is a process depending on the updating cycle. That is, the scheduler 430 requests the IOD data from the server to a pull handler 44 every updating cycle that is specified by a user. The pull handler 440 receives pull data
25 from a pull server (not shown) and stores the pull data in a storage region of the IntroPAD pull data 450, and transfers the

received information to the IntroPAD UI manager 410 so that it is displayed on the mobile communication terminal of the user.

FIG. 5 is a view for explaining an idle screen display method of the mobile communication terminal according to the present invention.

A user joins a service in order to receive contents information using a mobile communication terminal, and sets or selects the contents information (S501). The service-providing server can cooperatively operate with the contents information provider, and can include the contents providing server. The service-providing server serves to classify text information according to contents information within the server, and allocates a stack (S502).

An idle screen corresponding to the contents information, which is set or selected by the user, is pushed from the service-providing server. The pushed information is displayed on the idle screen (S503). In this time, the method further includes the steps of, before the pushed information is displayed on the idle screen, determining whether a SMS message has been received, and if it is determined that the SMS message is received, determining whether a corresponding SMS message is idle screen information, if it is determined that the received SMS message is a common SMS message, displaying the common SMS message on the display unit (S504), and if the received SMS message is idle screen information, classifying an idle screen message and then storing the classified messages in a given

stack of the memory.

In this time, the received idle screen message can be set in a mode in which a specific contents is set if the user of the mobile communication terminal wants to receive it, or can be
5 provided in a mode of pushing given information for advertising on the part of a contents provider.

Then, a user can pull detailed contents information among the push contents information from the idle screen displayed on the initial screen, and then receive the requested contents
10 information (S505). The contents information received at step S505 is read from the memory and the storage unit of the mobile communication terminal, and is displayed according to a predetermined screen configuration of the mobile communication terminal (S506).

15 Thereafter, the contents information displayed on the idle screen at step S503 is displayed according to a given template configuration.

FIG. 6 is a flowchart for explaining an information processing structure by the service step.

20 Referring to FIG. 6, in a service-providing server 600, an information type 601 can be configured according to a contents type 603, and a channel configuration 602 can be constructed according to the contents type 603. In a mobile communication terminal 610, a template type 604 can be constructed according
25 to the contents type, and a display mode 605 can be decided and displayed.

The contents type 603 is a classification system depending on a contents type that is provided to a contents provider (CP). The contents type is classified into text, image, animated image, motion picture, table and so on, which are respectively defined to be C1, C2, C3, C4, C5, C6, etc. The platform supports file formats such as txt, bmp, png, Gif, sis and mpeg according to the contents type. The size of data is classified as push and pull information, and is defined according to the contents type.

The configuration of the information type 601 depending on the contents type is classified into a push information type and a pull information type. The push information is classified into Notification type and Information type. Notification type has only a call back address value for data pull, and Information type has some information and a call back address value and supports SMS Push, Wap push, http push. Information type can support detailed information in the case of http push. Pull information is classified into Push & Pull type and Find & Pull type. Push & Pull type is for retrieving detailed information through Call back of Information push or Notification push. Find & Pull type is for retrieving detailed information of corresponding data.

The channel configuration 602 is provided according to a template that provides information classified every contents type. The template type 604 is divided into Main, Sub, and others depending on UI. The display mode 605 provides a sliding method, an icon enlargement method, a channel switch method or

an explicit real-time mode method. The channel configuration 602, the template type 604 and the display mode 605 will be described in detail later on.

FIG. 7 is a view for explaining an idle screen template type of the mobile communication terminal according to an embodiment of the present invention.

Referring to FIG. 7, a region 701 is a region for displaying up to 4 services in the form of multimedia, and providing various display modes so that various display layouts can be provided to a user. A region 702 is a region for displaying a quick launch icon for executing resources within a portable mobile communication device or a VM application and having access to a wireless Internet web site in a small icon form.

FIG. 8 is a view for explaining an idle screen template type of the mobile communication terminal according to another embodiment of the present invention.

Referring to FIG. 8, a region 801 is a region for displaying sliding text and sliding image. A region 802 is a region for displaying up to four services in the form of multimedia. A region 803 is a region for displaying a quick launch icon for executing resources within a portable mobile communication device or a VM application and having access to a wireless Internet web site in a small icon form.

FIG. 9 is a view for explaining still an idle screen template type of the mobile communication terminal according to

still another embodiment of the present invention.

Referring to FIG. 9, a region 901 is a region for displaying a title bar to represent the type of an idle screen service. A region 902 is a channel switch region for changing the display of contents. A region 903 is a region for displaying a contents information service in the form of multimedia. A region 904 shows a quick launch icon for executing resources within a portable mobile communication device or a VM application and having access to a wireless Internet web site in a small icon form, and a real-time information providing icon capable of receiving information in real time.

FIG. 10 shows a channel configuration that is provided from the service provider for providing contents information according to an embodiment of the present invention. There is shown in FIG. 10 an embodiment in the case where contents information is pushed to the mobile communication terminal. However, even when detailed information on contents information is pulled, a channel configuration is possible. It is possible to construct a channel by classifying a sliding region 1010 and an image region 1020 among a divided screen displayed on the mobile communication terminal. Further, the sliding region 1010 is composed of a text information channel 1010a that contains only text information and an image information channel 1010b that contains image information. The image region 1020 on which the contents information is displayed is composed of a channel 1020a in which text and image contain mixed information.

In this time, types C1 to C6 of the contents information, which correspond to respective channels of each of the regions, are specified. The channel configuration on the service provider side is connected to the screen region of the mobile communication terminal. A concrete example of the channel configuration displayed on the screen of the mobile communication terminal is shown in FIG. 11.

FIG. 11 shows an embodiment of the template configuration displayed on the display of the mobile communication terminal when the divided screen provided in the form of multimedia is channeled. As shown in FIG. 11, regions that display the multimedia screen shown in FIGS. 7 to 9 can be channeled every contents information type. Further, the screen, which is displayed when the channel constructed by the contents information providing server shown in FIG. 10 is displayed on the mobile communication terminal associated therewith, can be displayed variously depending on the template configuration shown in FIG. 11.

In this time, a user can select a corresponding channel, enlarge contents information that matches the corresponding channel, and display the enlarged contents information.

FIG. 12 shows an embodiment of divided screens that are provided in the form of multimedia. As shown in FIG. 12, if corresponding contents information is selected and displayed in the region where the multimedia screen shown in FIGS. 7 to 9 is displayed, only text can be displayed (1201), only image and

text or image can be displayed (1202), information can be tabled and displayed (1203), and text information can be listed and displayed (1204).

FIGS. 13 and 14 is a view for explaining a sliding method, which is an example of an information display method in which contents information is displayed and an information providing method according to the present invention.

Referring to FIG. 13, if sliding text information 1301 is confirmed or a service call key is selected, a message indicating that detailed information is called is displayed on the screen window of the mobile communication terminal (1302). Detailed information corresponding to the selected information is then displayed (1303). Further, referring to FIG. 14, if sliding image information 1401 is confirmed or a service call key is selected, a message indicating that detailed information is called is displayed on a screen window of a mobile communication terminal (1402). Detailed information (image and text information) corresponding to the selected information is then displayed (1403). In this time, the display presented in 1302 and 1402 can be omitted.

FIG. 15 is a view for explaining an icon enlargement method, which is an example of an information display method in which contents information is displayed and an information providing method according to the present invention.

Referring to FIG. 15, if contents information is selected from an image region 1501 that is divided and displayed in the

form of multimedia by using an enlargement icon, a corresponding image is enlarged and displayed. In this time, it is possible to enlarge a corresponding image in the image region 1501 when it is activated using an up and down key or selected using a select
5 key. If a confirmation or service call key is selected from an enlarged image region 1502, a message indicating that an idle screen message is called is displayed on the screen window of the mobile communication terminal (1503). Detailed information corresponding to the selected information is displayed (1504).

10 FIG. 16 is a view for explaining a real-time service providing method in the idle screen template type of the mobile communication terminal shown in FIG. 9 according to the present invention.

Referring to FIG. 16, if a channel is selected in the
15 region 902 of FIG. 9 to select a real-time icon 1601 of the mobile communication terminal, the function is operated in real time to provide information. If the real-time icon 1601 is selected, the operation of the real-time function is released. Contents that will be provided in real time can include contents
20 that change in real time, such as a current price, a current price of securities issue, chart and stock price index. In this time, in the real-time information providing method, information can be received only an instant time desired by a user so that information by explicit selection of the user can be provided.
25 It is thus possible to provide means that can prevent unnecessary information from being provided and can provide

information of a high quality to a user.

Industrial Applicability

According to the present invention, in order to provide
5 useful information to a user, the information is stored in the
user's mobile communication terminal and the stored information
can be displayed periodically or when an event occurs. Thus,
load of an information provider system can be removed.

Further, a user can confirm the use of received idle screen
10 information consistently or when an event occurs. It is thus
possible to maximize use efficiency of information.

Also, a user can set not only specialized information such
as financial information and entertainment information, but also
a variety of contents provided by a contents provider system
15 using a portable mobile communication device. Thus, the type of
received information can be diversified and can be used usefully
in a Push & Pull mode.

Moreover, more detailed information can be provided through
interactive setting through access with a related wireless
20 Internet web site by means of a hyperlink function for receiving
the information corresponding to information provided.

Further, an operator of a mobile communication network can
perform advertising and campaign for various advertising service,
public notice, etc. every customer. Thus, a user-friendly
25 management is possible.

Furthermore, internal resources that are frequently used by

a user are disposed in an idle screen of a portable mobile communication device. It is thus possible to operate a user-oriented terminal.

In addition, some of channels that are constructed as means
5 for providing information can be transferred and leased to
external service provider. It is thus possible to service a
variety of contents and information. This reduces overlapped
developments of a service infrastructure and allows mobile
communication resources to be more efficiently utilized and
10 operated.

What Is Claimed Is:

1. An apparatus for controlling and operating resources of an idle screen for a mobile communication terminal having an idle screen control function, comprising:

5 the mobile communication terminal on which desired contents information is displayed through a mobile communication network;

 a contents providing server for providing the contents information;

 an idle screen providing server that provides a message
10 corresponding to the provided contents information to a message providing server; and

 the message providing server for receiving the message, which is converted to have an idle screen message format, from the idle screen providing server, and then providing the message
15 to the mobile communication terminal through the communication network,

 wherein the mobile communication terminal comprises a data viewer, which is a module for receiving push data or pull data for information set by a user and displaying those data
20 according to a predetermined format, and

 wherein the idle screen providing server comprises an idle screen control system that provides a function of generating an idle screen message, a contents information management server that provides a community service, a PDM server that performs an
25 optimization function of personal information management, and a CRM server that provides a variety of services depending on a

user.

2. The apparatus as claimed in claim 1, wherein the mobile communication terminal further comprises one or more of a display manager for displaying data constituting regions of an idle screen, an event handler for processing various events generated by a user or a mobile communication terminal, and a data interface module, which is responsible for an interface of a push data manager being a module for processing the push data or an idle screen control system of the mobile communication terminal.

3. The apparatus as claimed in claim 1, wherein the idle screen control system further comprises one or more of a push agent that transmits processed push data to a push system of a service provider, a pull agent that searches data requested by the mobile communication terminal and transmits the searched data to the mobile communication terminal, a data formatter that converts data into a format that can be recognized by an idle screen control client of the mobile communication terminal, and an information match maker that searches data set in a profile by the user and extracts only the data set by the user from data received from the contents information server.

4. A method of controlling and operating resources of an idle screen for a mobile communication terminal in a method of

controlling an idle screen of the mobile communication terminal in a system for providing contents information to the mobile communication terminal, comprising the steps of:

5 (a) allowing a user to join a service so as to receive contents information through the mobile communication terminal, and to set or select the contents information;

(b) allowing a service server to cooperatively operate with a contents information provider, classify multimedia information received from the contents information provider based on the
10 contents information within the service server, and allocate a channel and a stack;

(c) allowing idle screen information corresponding to the contents information that is set or selected by the user to be pushed from the service server, and the pushed information to be
15 displayed on an idle screen;

(d) allowing the user to pull detailed contents information among pushed contents information on the idle screen, which is displayed on an initial screen, and to receive the pulled contents information; and

20 (e) allowing the contents information that is received in step (d) to be read from a memory and a storage unit of the mobile communication terminal, and the contents information to be displayed according to a predetermined screen configuration of the mobile communication terminal,

25 wherein the contents information displayed on the idle screen in step (c) is displayed based on a given template

configuration.

5 5. The method as claimed in claim 4, wherein the idle screen includes screens divided into a first region and a second region,

the first region is displayed as divided screens, and each of the divided screens has a display mode in which corresponding contents information is displayed in the form of multimedia, and

10 the second region includes a menu corresponding to the contents information displayed on the first region, or a quick launch, which can execute resources within a portable mobile communication device or a virtual machine (VM) application and can have access to a wireless Internet web site, which are provided in the form of an icon.

15

6. The method as claimed in claim 4, wherein the idle screen includes screens divided into a first region and a second region,

20 the first region includes a display mode in which the contents information is displayed as a sliding text or image in a list of a table form, and

the second region includes a menu corresponding to the contents information displayed on the first region, or a quick launch capable of executing resources within a portable mobile
25 communication device or an virtual machine (VM) application and having access to an wireless Internet web site, which is

provided in the form of an icon.

7. The method as claimed in claim 4, wherein the idle screen includes screens divided into a first region and a second
5 region,

the first region includes a display mode in which a sliding text or image is displayed,

the second region is displayed as divided screens, and each of the divided screens has a display mode in which corresponding
10 contents information is displayed in the form of multimedia, and

the third region includes a menu corresponding to the contents information displayed on the first region and the second region, or a quick launch capable of executing resources within a portable mobile communication device or an virtual
15 machine (VM) application and having access to an wireless Internet web site, which is provided in the form of an icon.

8. The method as claimed in claim 4, wherein the idle screen includes screens divided into a first region, a second
20 region, a third region and a fourth region,

the first region includes a display mode in which a sliding text or image is displayed,

the second region includes a channel switch display mode in which respective contents information is channeled,

25 the third region is displayed as divided screens, and each of the divided screens has a display mode in which corresponding

contents information is displayed in the form of multimedia, and

the fourth region includes a menu corresponding to the contents information displayed on the first region, the second region and the third region, or a quick launch capable of
5 executing resources within a portable mobile communication device or an virtual machine (VM) application and having access to an wireless Internet web site, which is provided in the form of an icon.

10 9. The method as claimed in any one of claims 5, 7 and 8, wherein the divided screens in the form of multimedia, of the first region of claim 5, the second region of claim 7 and the third region of claim 8 display a title having the contents information built in.

15 10. The method as claimed in any one of claims 5 to 8, wherein the screens of the first region of claim 5, the first region of claim 6, the first region of claim 7, the second region of claim 7, the first region of claim 8 and the third
20 region of claim 8 display channeled contents information, and the channels are divided and displayed.

11. The method as claimed in any one of claims 5 to 8, wherein the screens of the first region of claim 5, the first
25 region of claim 6, the first region of claim 7, the second region of claim 7, the first region of claim 8 and the third

region of claim 8 are one of text information, text information and image information, table information, chart or graphic information, and motion picture information containing audio information or audio information.

5

12. The method as claimed in any one of claims 5 to 8, wherein each of the icon forms can be added, omitted and changed in order, and can be selectively displayed according to the input of a given key and a given status of a terminal.

10

13. The method as claimed in any one of claims 5, 7 and 8, wherein the screens of the multimedia form of the first region of claim 5, the second region of claim 7 and the third region of claim 8 are provided in the form of an icon, and

15

detailed information is displayed on the whole screen, the whole display window, the whole of each of the regions or some of each of the regions in the idle screen corresponding to each contents information by clicking on the divided contents information icon.

20

14. The method as claimed in claim 13, wherein the icon form displays multimedia information that replaces information to be represented, or multimedia information of a look-ahead form, which is reduced from information to be represented.

25

15. The method as claimed in any one of claims 6, 7 and 8,

wherein the screen of the first region of claim 6, the first region of claim 7, and the first region of claim 8 are formed in the icon form, and

contents information corresponding to a multimedia icon
5 such as sliding text or image is displayed in detail on the whole screen, the whole display window, the whole of each of the regions or some of each of the regions by selecting the icon form or inputting a key for confirming selection.

10 16. The method as claimed in claim 8, wherein a real-time icon is included in the menu of the fourth region, and if the real-time icon corresponds to contents information that is changed in real time, the contents information is provided in real time by selecting the real-time icon.

15 17. The method as claimed in any one of claims 5 to 8, 15 and 16, wherein displays multimedia information that replaces information to be represented, or multimedia information of a look-ahead form, which is reduced from information to be
20 represented.

18. A method of controlling and operating resources of an idle screen for a mobile communication terminal in a method of controlling an idle screen and providing/displaying information
25 through a channel switch region for switching a screen for displaying information of a mobile communication terminal,

comprising the steps of:

(a) allowing a user to input a direction key or a specific key that is allocated to switch a channel so as to switch information contents displayed;

5 (b) reading information to be displayed on an idle screen of a channel before or after a current channel;

(c) displaying contents information according to a predetermined screen configuration on an idle screen of the mobile communication terminal; and

10 (d) reading information to be displayed on the idle screen in step (b) from a memory and a storage unit of the mobile communication terminal, or requesting the information for a service server and then reading the information from the memory,

wherein the contents information displayed on the idle
15 screen in step (c) is displayed according to a given template configuration, and

after step (c), the displayed information is updated according to information received in a predetermined period.

ABSTRACT

The present invention relates to a mobile communication terminal and method of driving the same, and an idle screen service system and method using the same. According to the
5 present invention, the method includes the steps of (a) allowing a user to set contents information; (b) allowing a service-providing server to classify the contents information and to allocate a stack; (c) allowing idle screen information
10 corresponding to the contents information to be pushed; (d) allowing the user to request detailed contents information and to receive the requested contents information; and (e) allowing the contents information to be displayed according to a predetermined screen configuration of a mobile communication
15 terminal, wherein the contents information of step (c) is displayed according to a given template configuration.

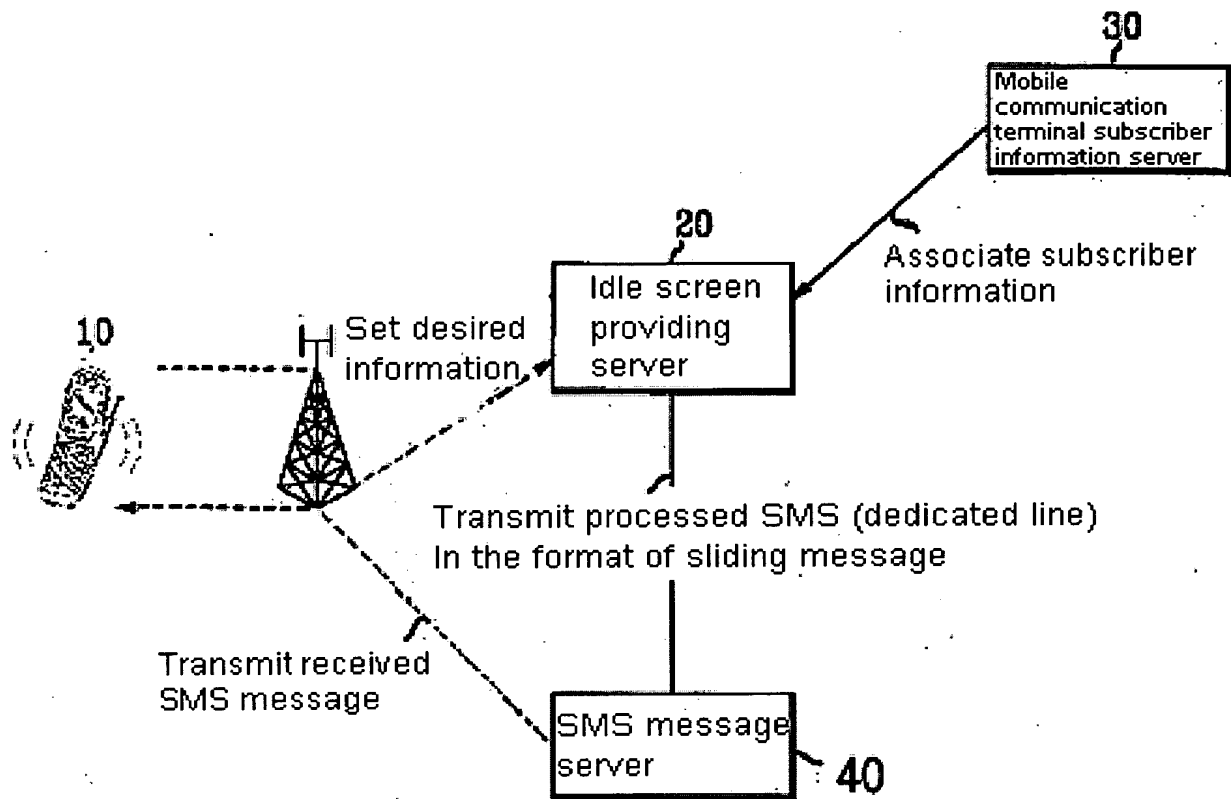


FIG. 1

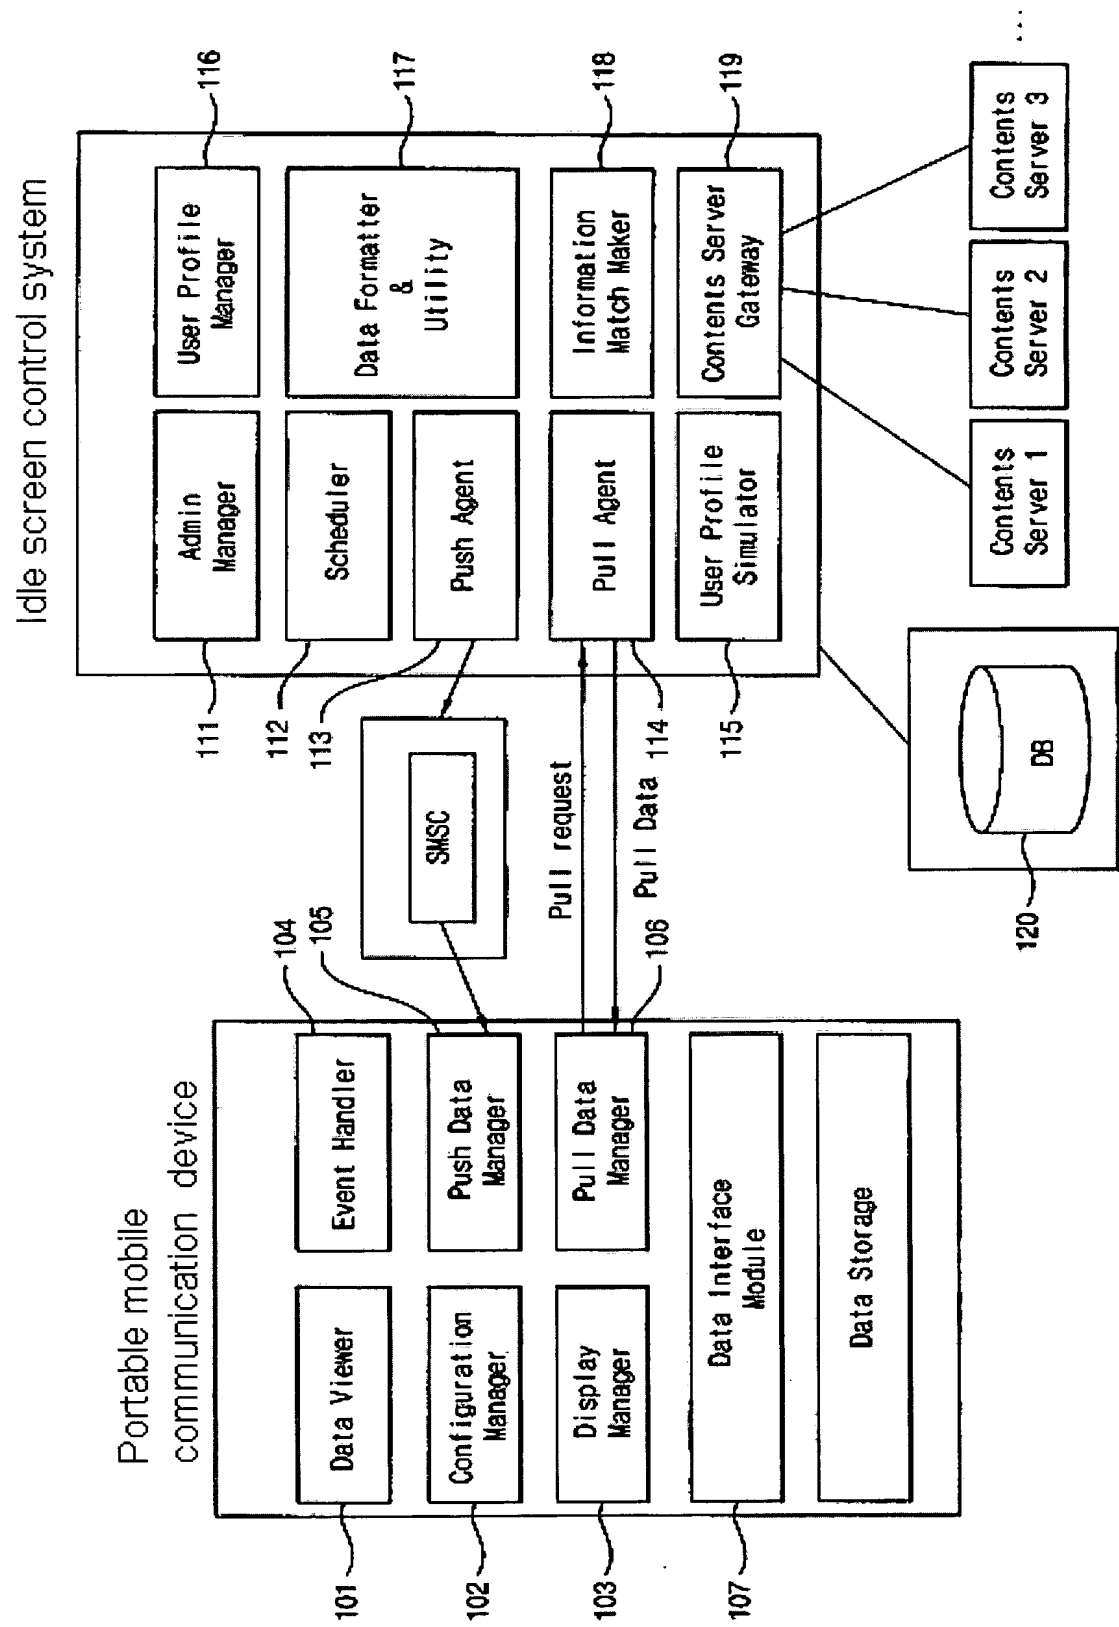


FIG. 2

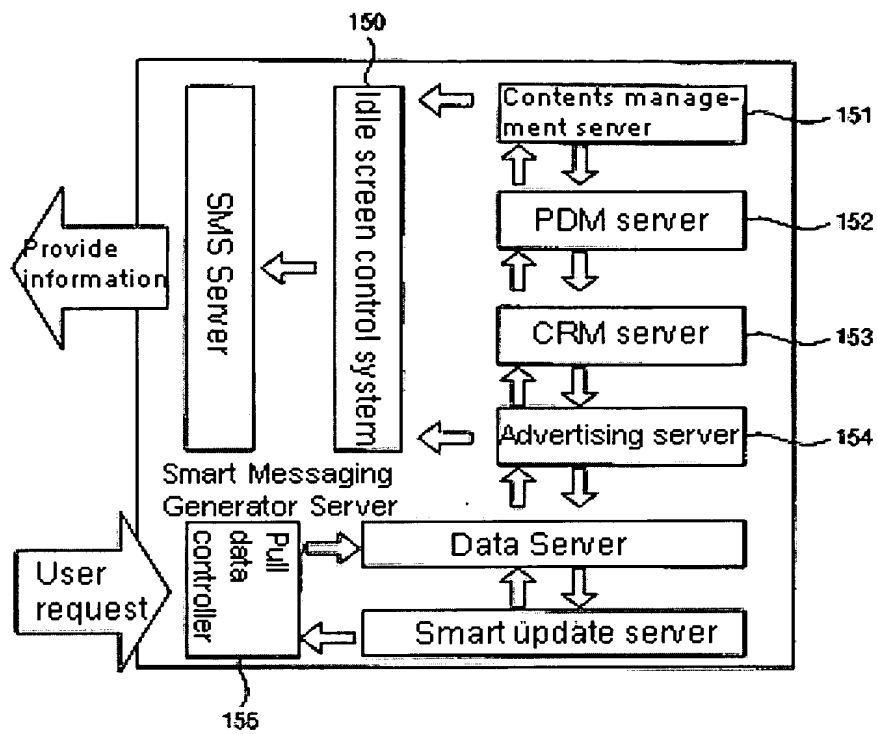


FIG. 3

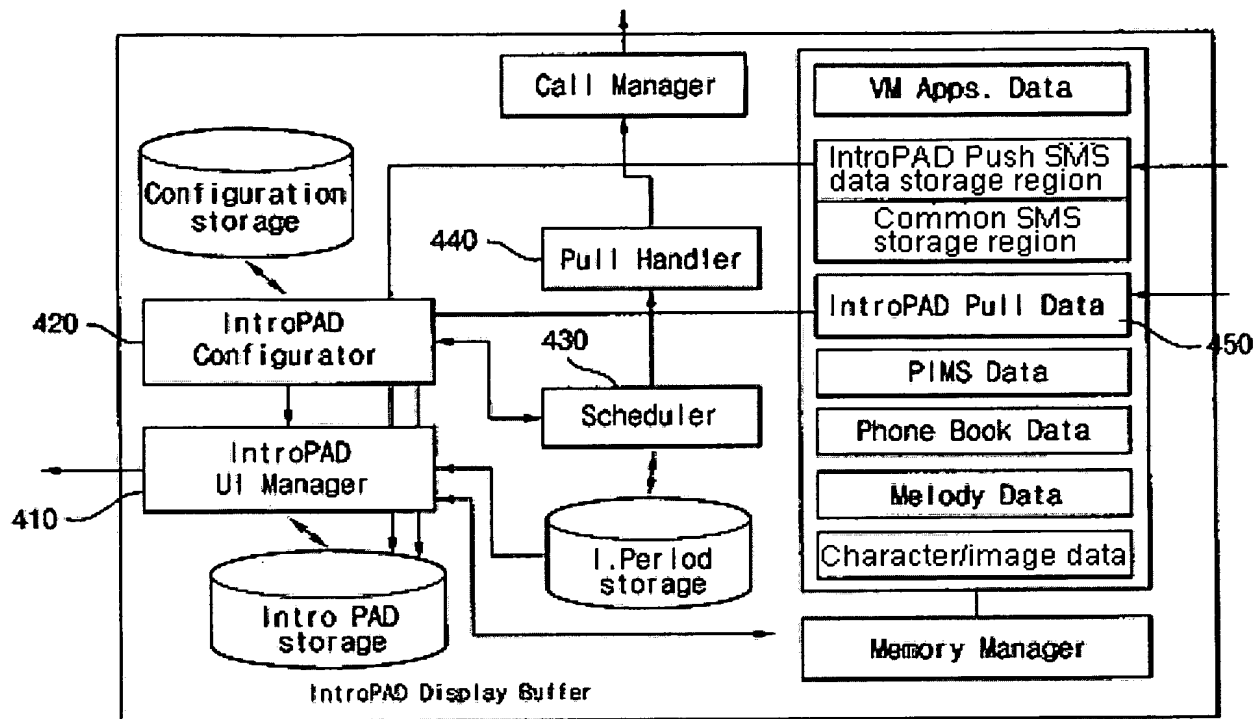


FIG. 4

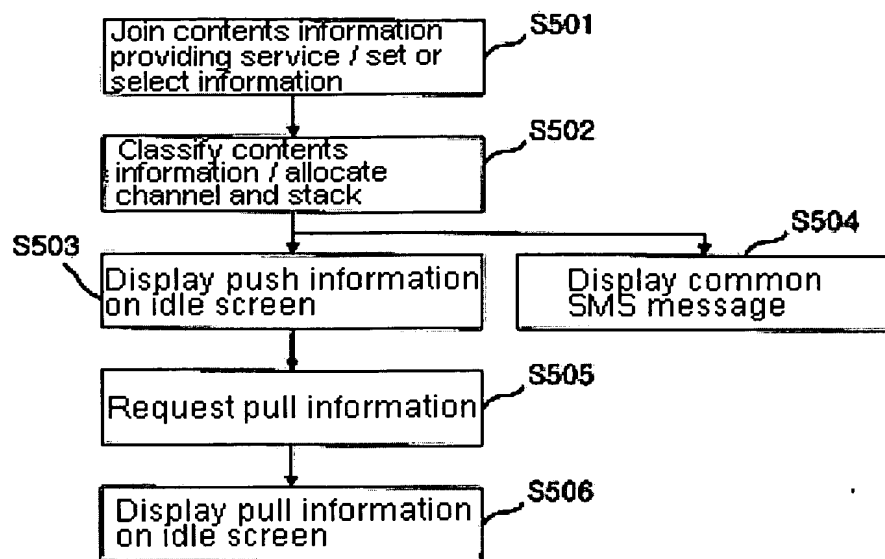


FIG. 5

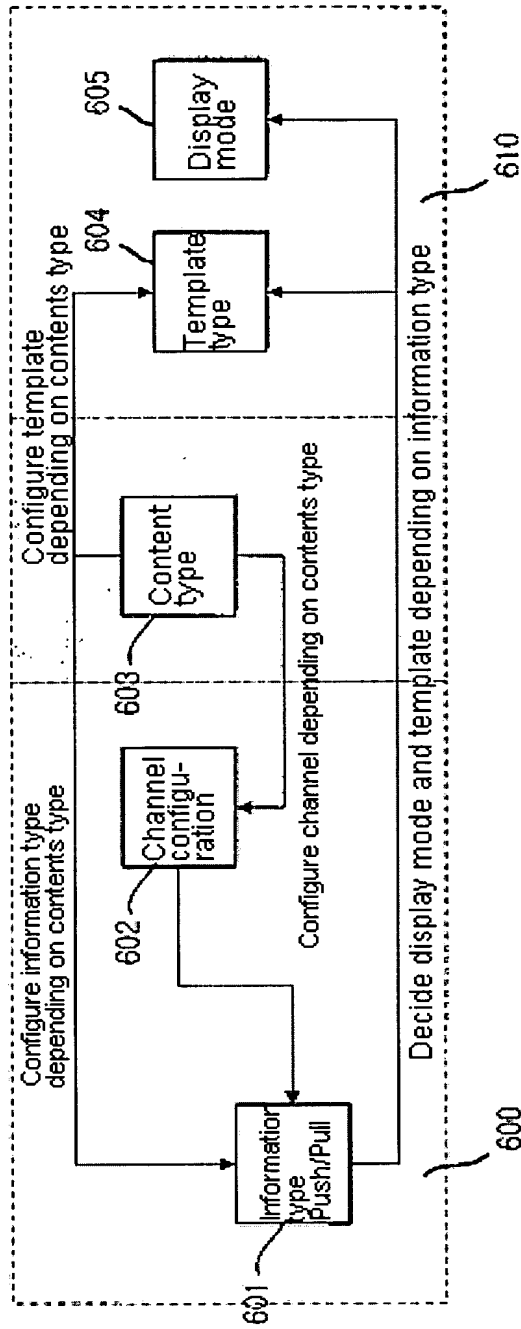


FIG. 6

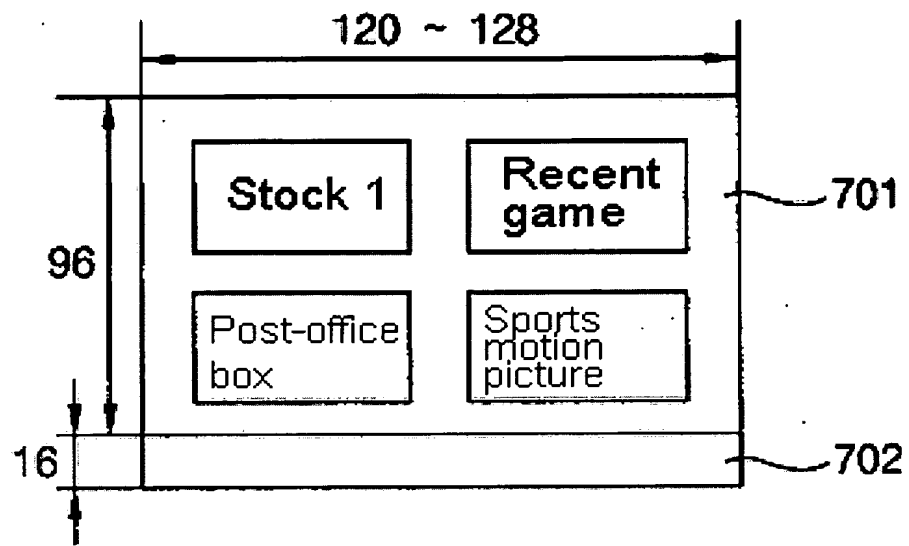


FIG. 7

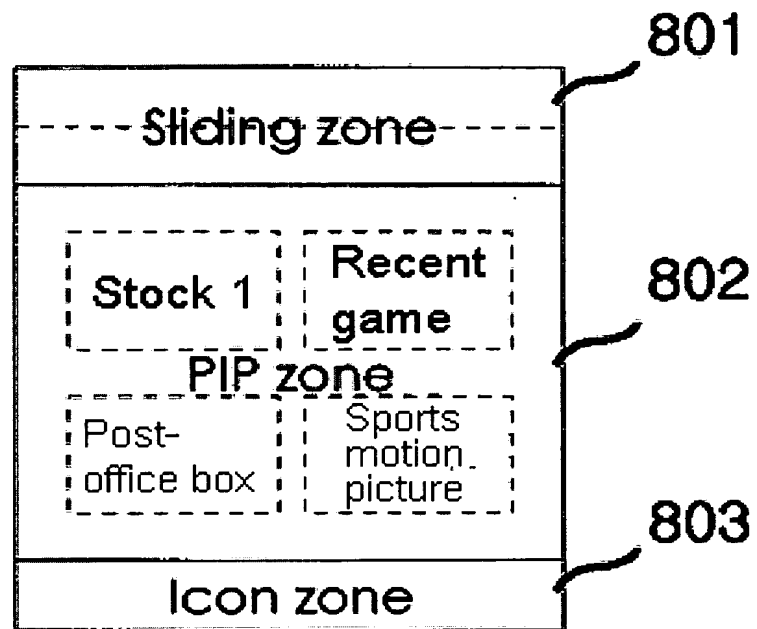


FIG. 8

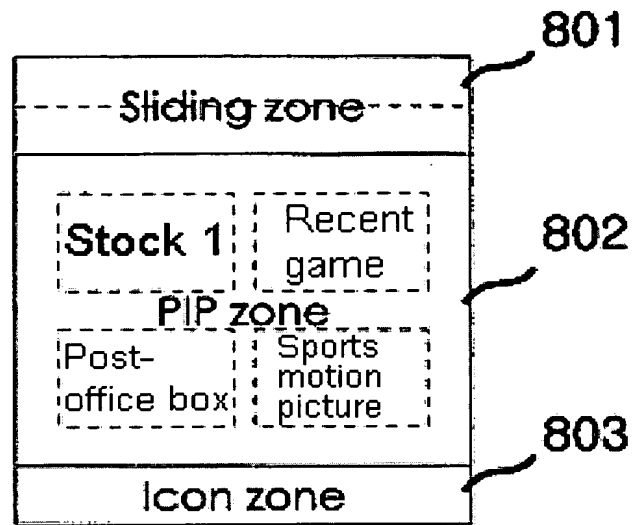


FIG. 9

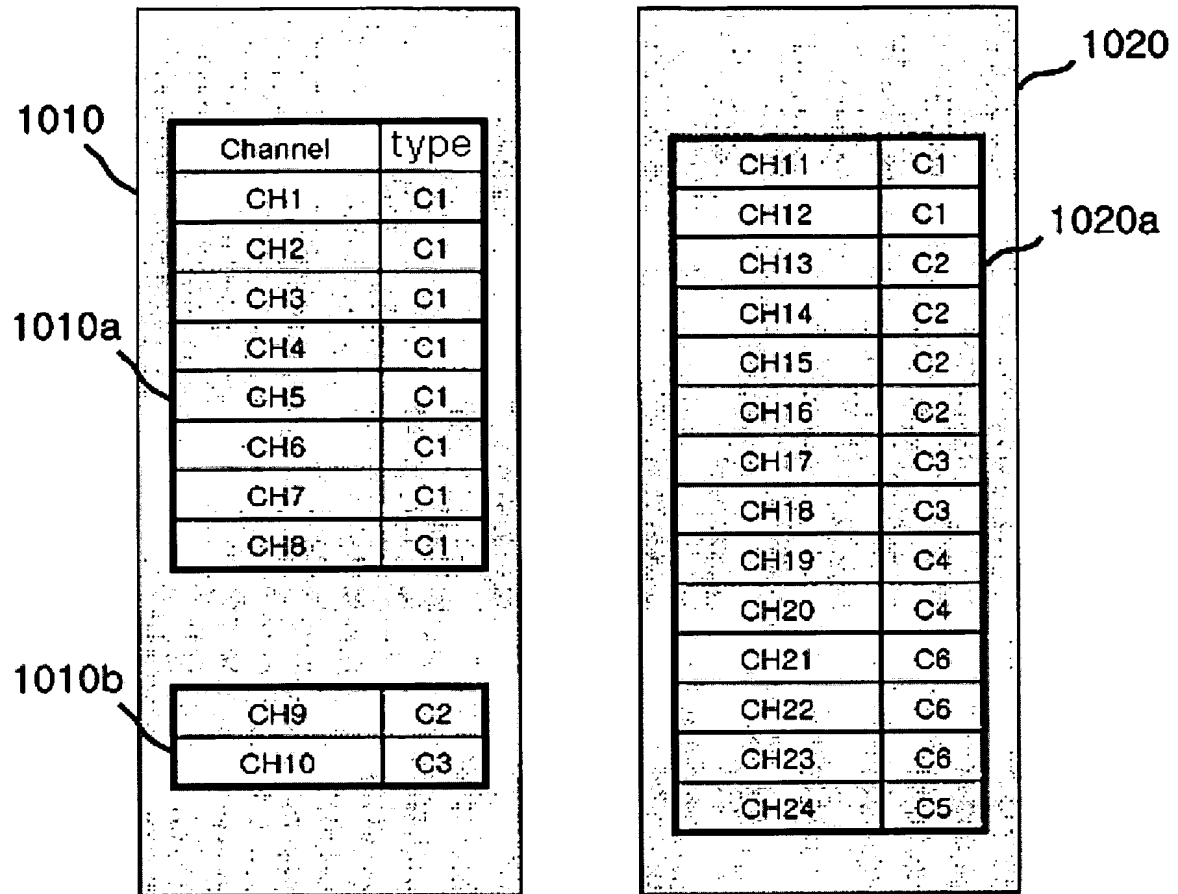


FIG. 10

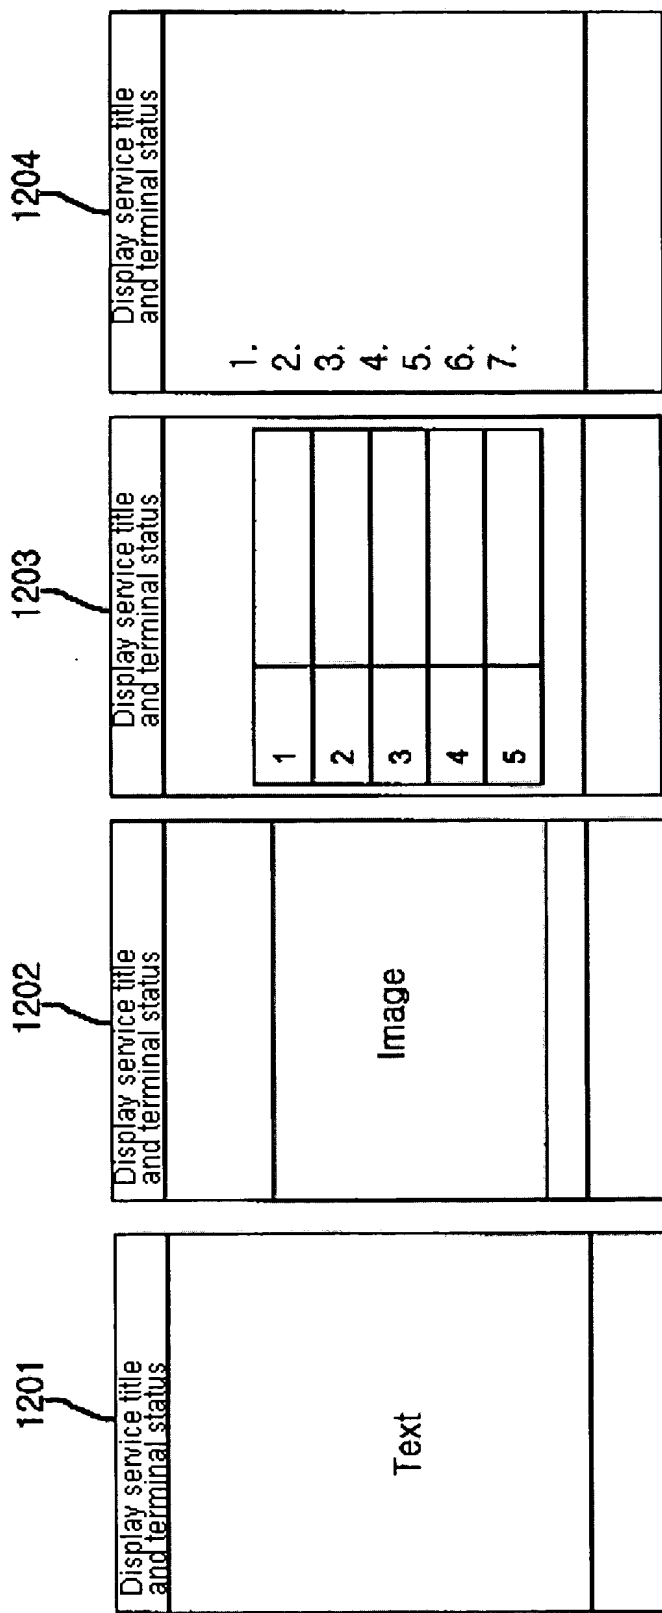


FIG. 12

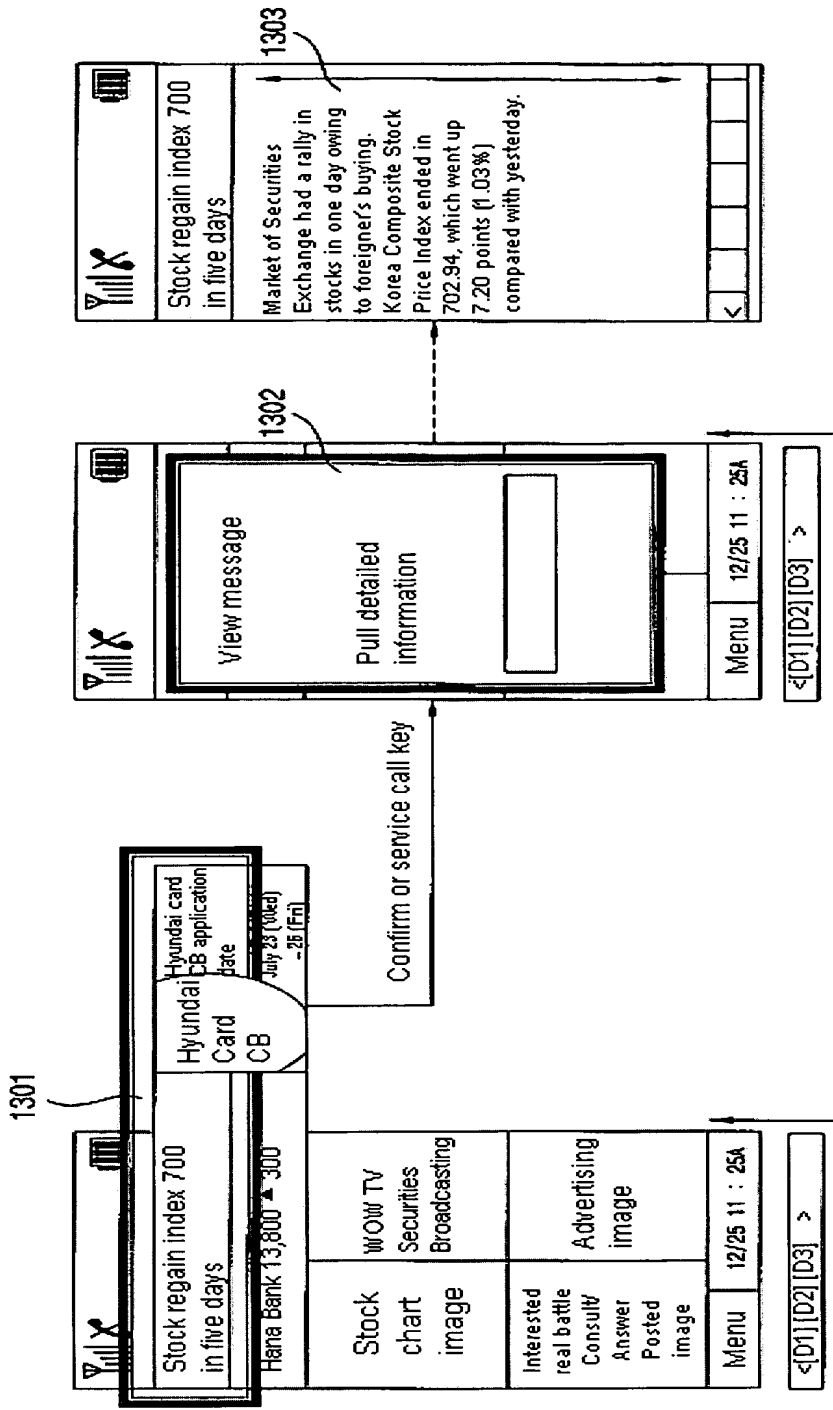


FIG.13

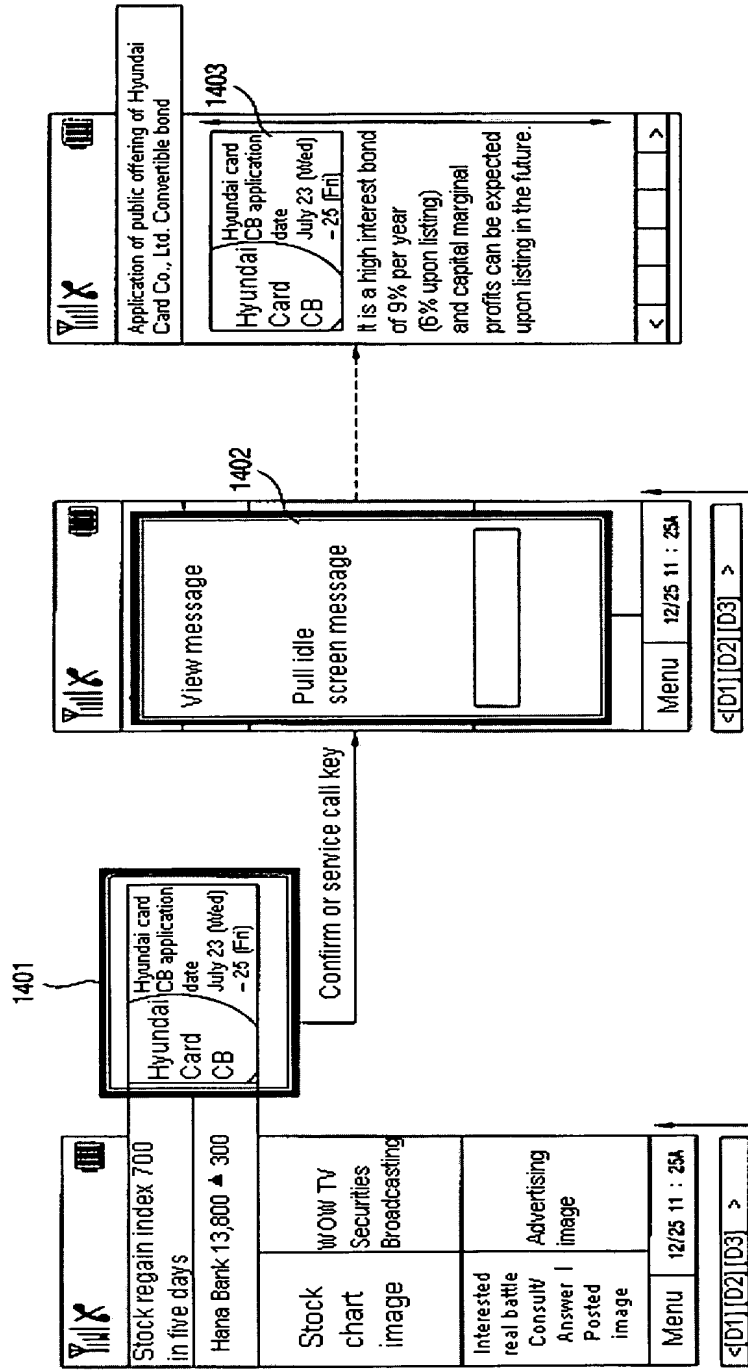


FIG. 14


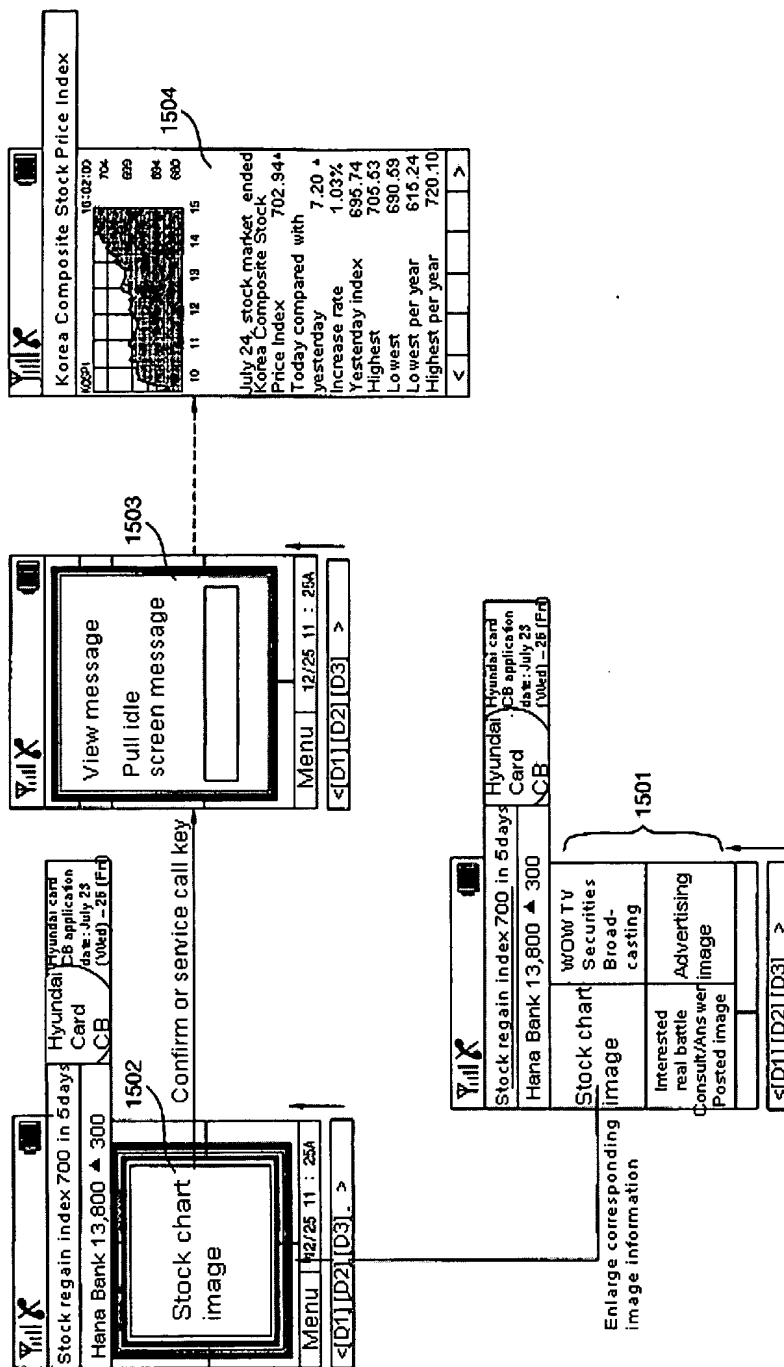


FIG.15

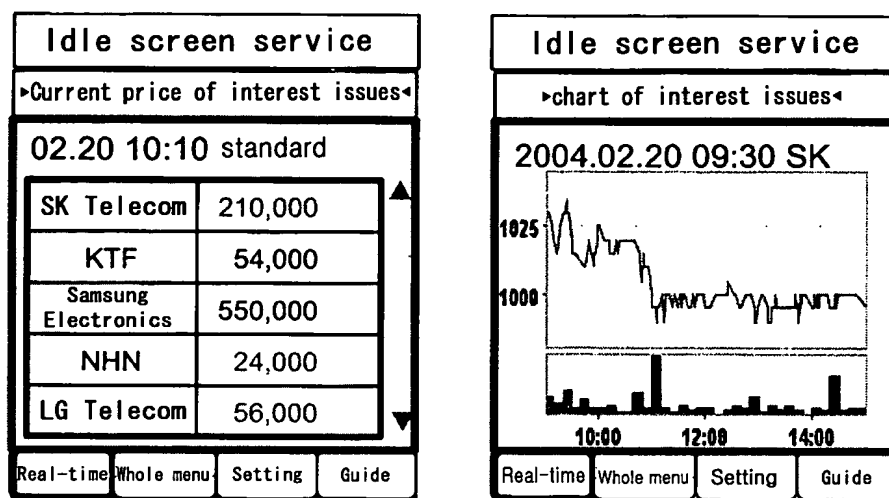

1601

FIG. 16